
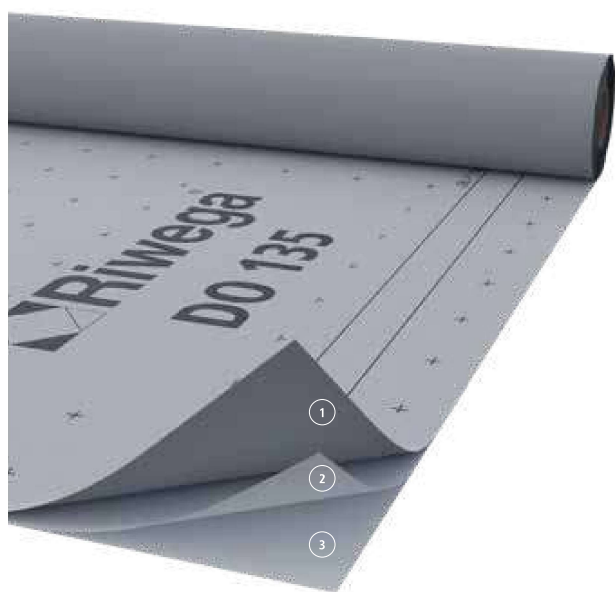


QUICK OVERVIEW: STRENGTHS

The 100% PP solution with ultra-light grammage

- Highly breathable, water tight membrane
- The lightest roof membrane which is also ideal for wind tightening ventilated facades
- High tearing resistance
- Non-slip surface allows easy laying
- 100% in completely recyclable polypropylene

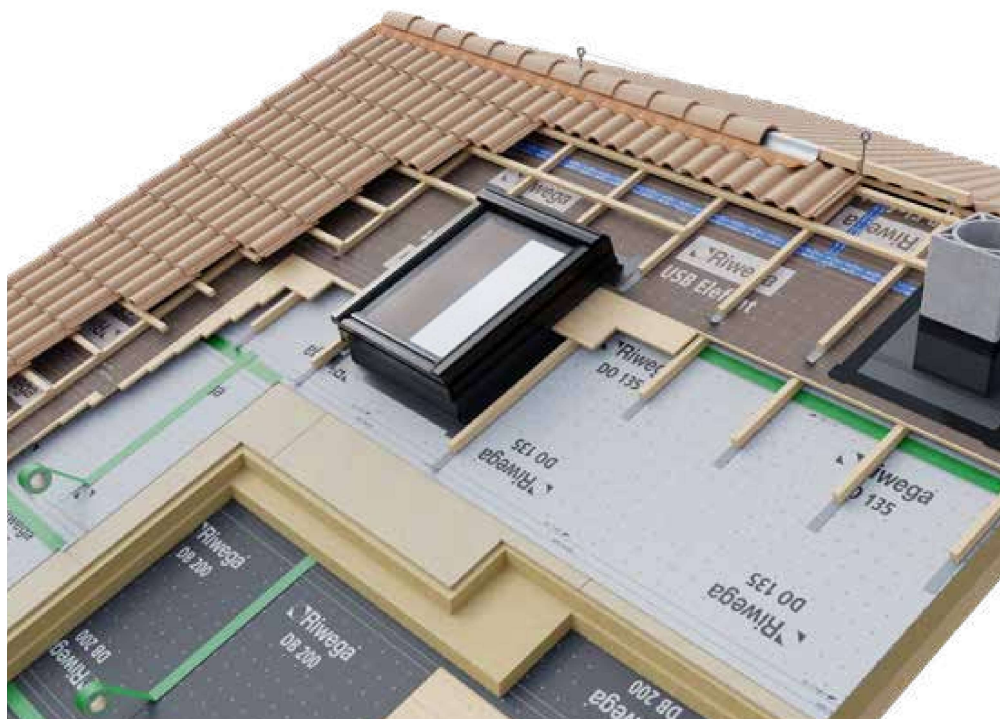

Composition:

- ① Protective UV stabilized, water repellent layer in PP
- ② Microporous film in PP
- ③ Protective layer in PP

Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m ²)
02010191	02020313	1,5	50	2250

Features:



Classification:



Technical data sheet

Material	PP.PP.PP	
Film	PP	
Colour	Grey	
Use underneath PV panels	NO	
Mass per unit area	EN 1849-2	143 g/m ²
Thickness		0,50 mm
Sd value	EN ISO 12572	0,02 m
Water vapour permeability	EN ISO 12572	~ 1000 g/m ² /24 h
Water column	EN 20811	>200 cm
Heavy rain test	TU Berlin	passed
Resistance to water passage	EN 1928 (Met. A)	W1
Tensile strength MD/CD*	EN 12311-1	270 / 250 N/50mm
Elongation MD/CD*	EN 12311-1	70 / 80 %
Tear resistance MD/CD*	EN 12310-1	190 / 200 N
Fire reaction class	EN 13501-1	E
UV stability		2 months
Temperature resistance		-40°/+90°C

*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products