




QUICK OVERVIEW: STRENGTHS

The essential for wooden joints

- Sealing gasket
- Waterproofing to air, water and wind of the connections in the wooden houses
- Resistant to dilatation and vibrations due to its high elasticity
- Also ideal for sealing of the lower joint of the windows and doors

Features:

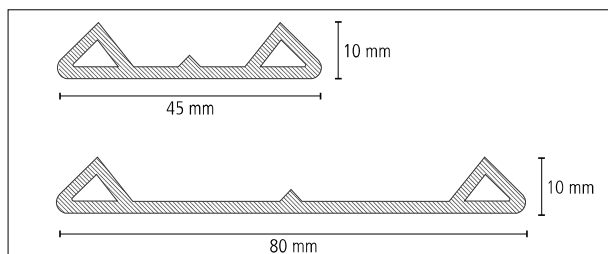

Composition:

Expanded elastic EPDM ①

Technical data sheet

| | | |
|-----------------------|--|--------------------------------|
| Material | | expanded EPDM |
| Side overhangs height | | ~10 mm |
| Density | | 0,5 g/cm ³ |
| Working temperature | | -45°C / +120°C |
| Storage place | | dry, protected from UV rays |
| Storage period | | max. 24 months |

Codes and measures

| Version | Code | Measures (mmxm) | Box (pc) | Pallet (box) |
|------------|-----------|-----------------|----------|--------------|
| GAE LVD 45 | 020450071 | 45x25 | 20 | 1 |
| GAE LVD 80 | 02045007 | 80x25 | 12 | 1 |