



QUICK OVERVIEW: STRENGTHS

Thick, rough and resistant

- Highly breathable, water tight membrane
- Optimized performance, guaranteed for 15 years thanks to the new UV10 Bikom film
- Perfect watertight wooden or concrete pitched roofs
- Rough surface compatible with mortar or foam

Features:




Classification:



Technical data sheet		
Material		PP-composite
Film		UV10 Bikom
Colour		Wine red
Use underneath PV panels		NO
Mass per unit area	EN 1849-2	235 g/m ²
Thickness		1,05 mm
Sd value	EN ISO 12572	0,07 m
Water vapour permeability	EN ISO 12572	~ 500 g/m ² /24 h
Watern column	EN 20811	>800 cm
Heavy rain test	TU Berlin	passed
Resistance to water passage	EN 1928 (Met. A)	W1
Tensile strength MD/CD*	EN 12311-1	420 / 310 N/50mm
Elongation MD/CD*	EN 12311-1	50 / 60 %
Tear resistance MD/CD*	EN 12310-1	270 / 330 N
Fire reaction class	EN 13501-1	E
UV stability		6 months
Temperature resistance		-40°/+100°C

*MD = longitudinal CD = transversal
Riwega Srl is not responsible for negligent and improper use of its products

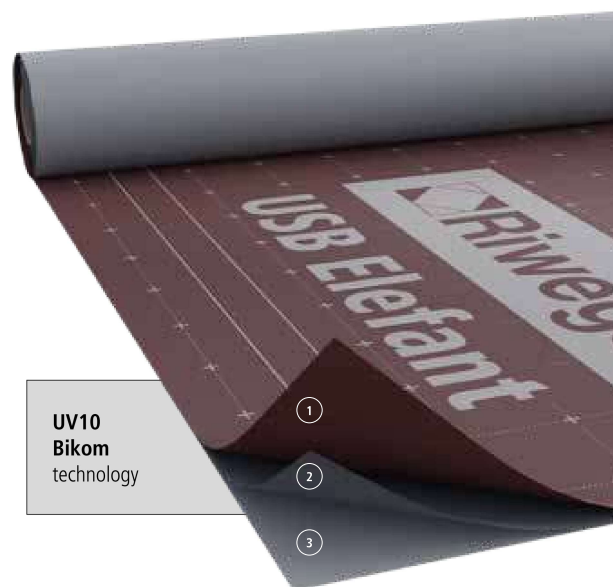

UV10
Bikom
technology

Composition:

- Protective UV stabilized, water repellent layer in PP ①
- Film UV10 Bikom, monolithic, elastic ②
- Protective layer in PP ③

Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m ²)
02050150	02020233	1,5	40	1200
020501500	020202330	3,0	30	1800